

Shanghai TOMA Building Material Co.,Ltd

Factory address 1: No.3 Building,239 Jiuyuan Road,Qingpu District,Shanghai,China

Factory address 2: Miluo Industrial Zone,Yueyang city,Hunan province,China

Mobile/wechat:18108431095 Whatsapp:008613774419346

Website: www.tuoman.com info@tuoman.com shanghaituoman@gmail.com

TOMA Fire rated steel door

Fire rated steel door frame width: 4cm for middle installation, 7cm for outside installation


Frame thickness 10cm, frame steel panel thickness 1.2mm

Door sash thickness 5cm, door sash steel panel thickness 0.8mm

Standard configuration include door frame, door sash, fire rated lock,

Optional configuration include door closer, sequencer, Escape lock, small glass window,


Tube well lock, Stainless steel kick resist plate

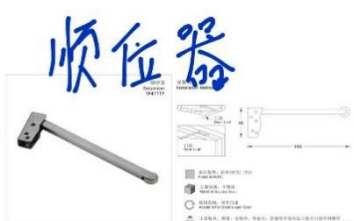

sequencer



door closer

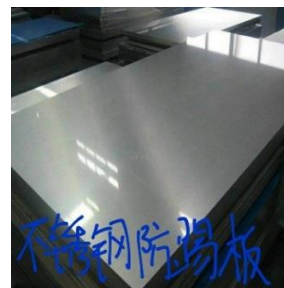

Stainless steel kick resist plate



Escape lock




Tube well lock




fire rated door with door closer, sequencer, small glass window

Basic construction of the fire rated steel door

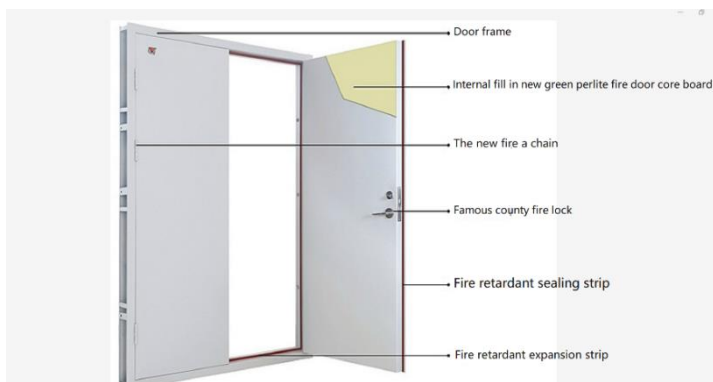

Fire rated steel door styles (different color optional)

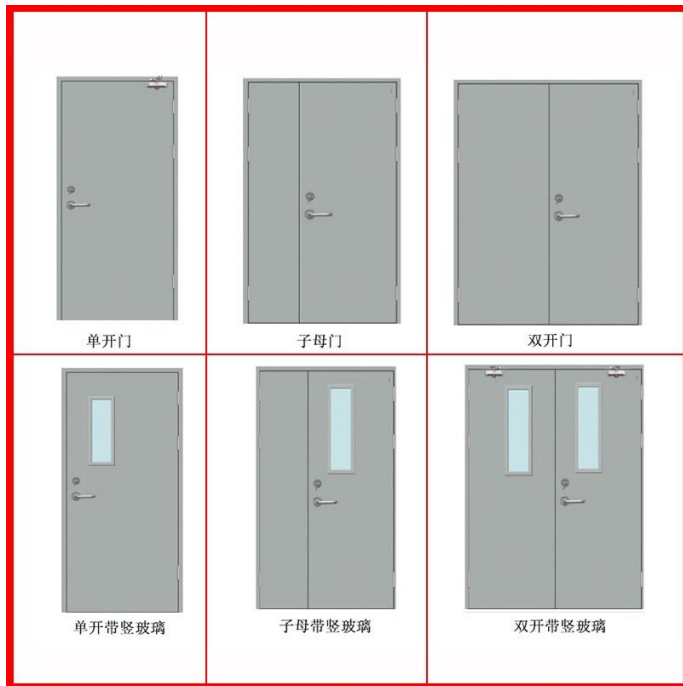

Fire rated door middle installation



Fire rated door outside installation

